




ES411 K2

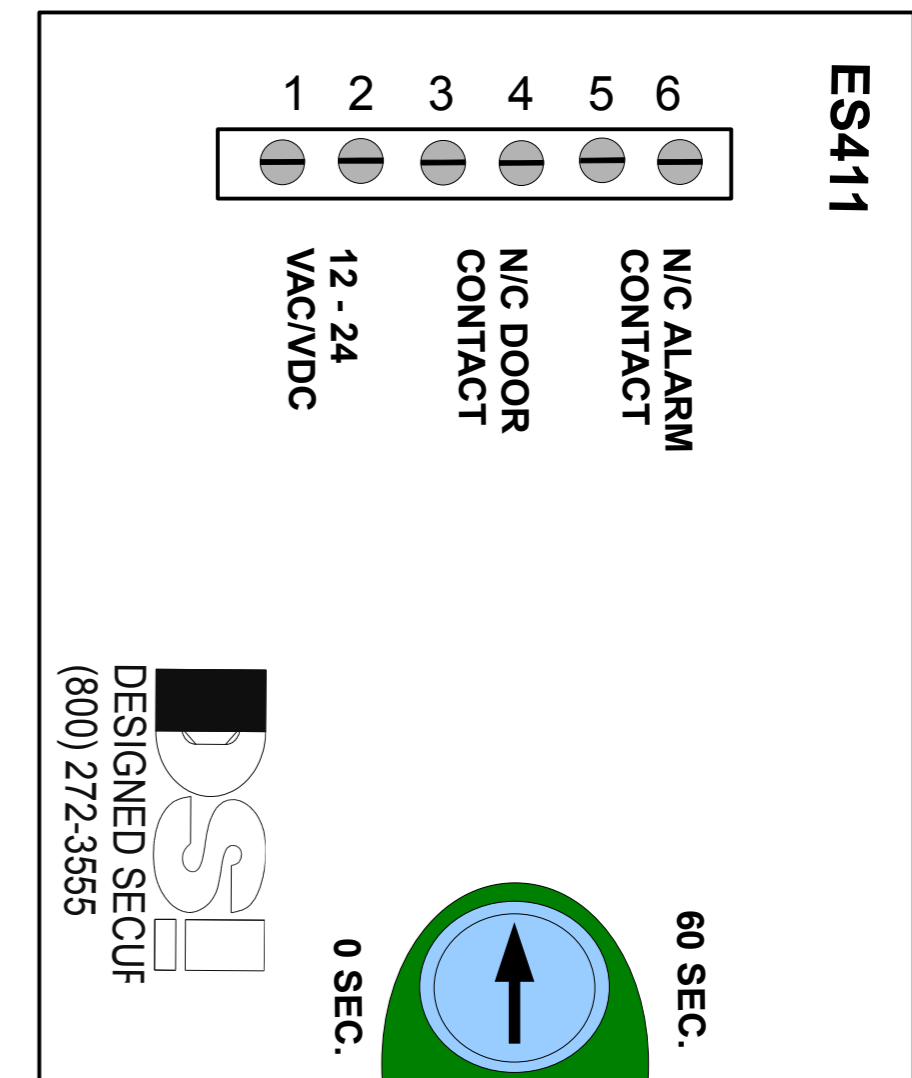


K2 Key (Side View)


ES411-K2 (Back View)

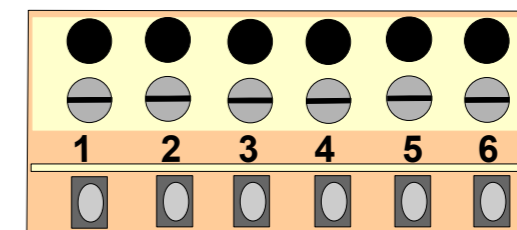

Alarm delay adjustment (0-60sec)

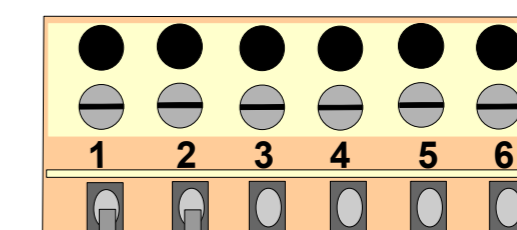

Note: In-line diodes are for 16-24 volt power supplies

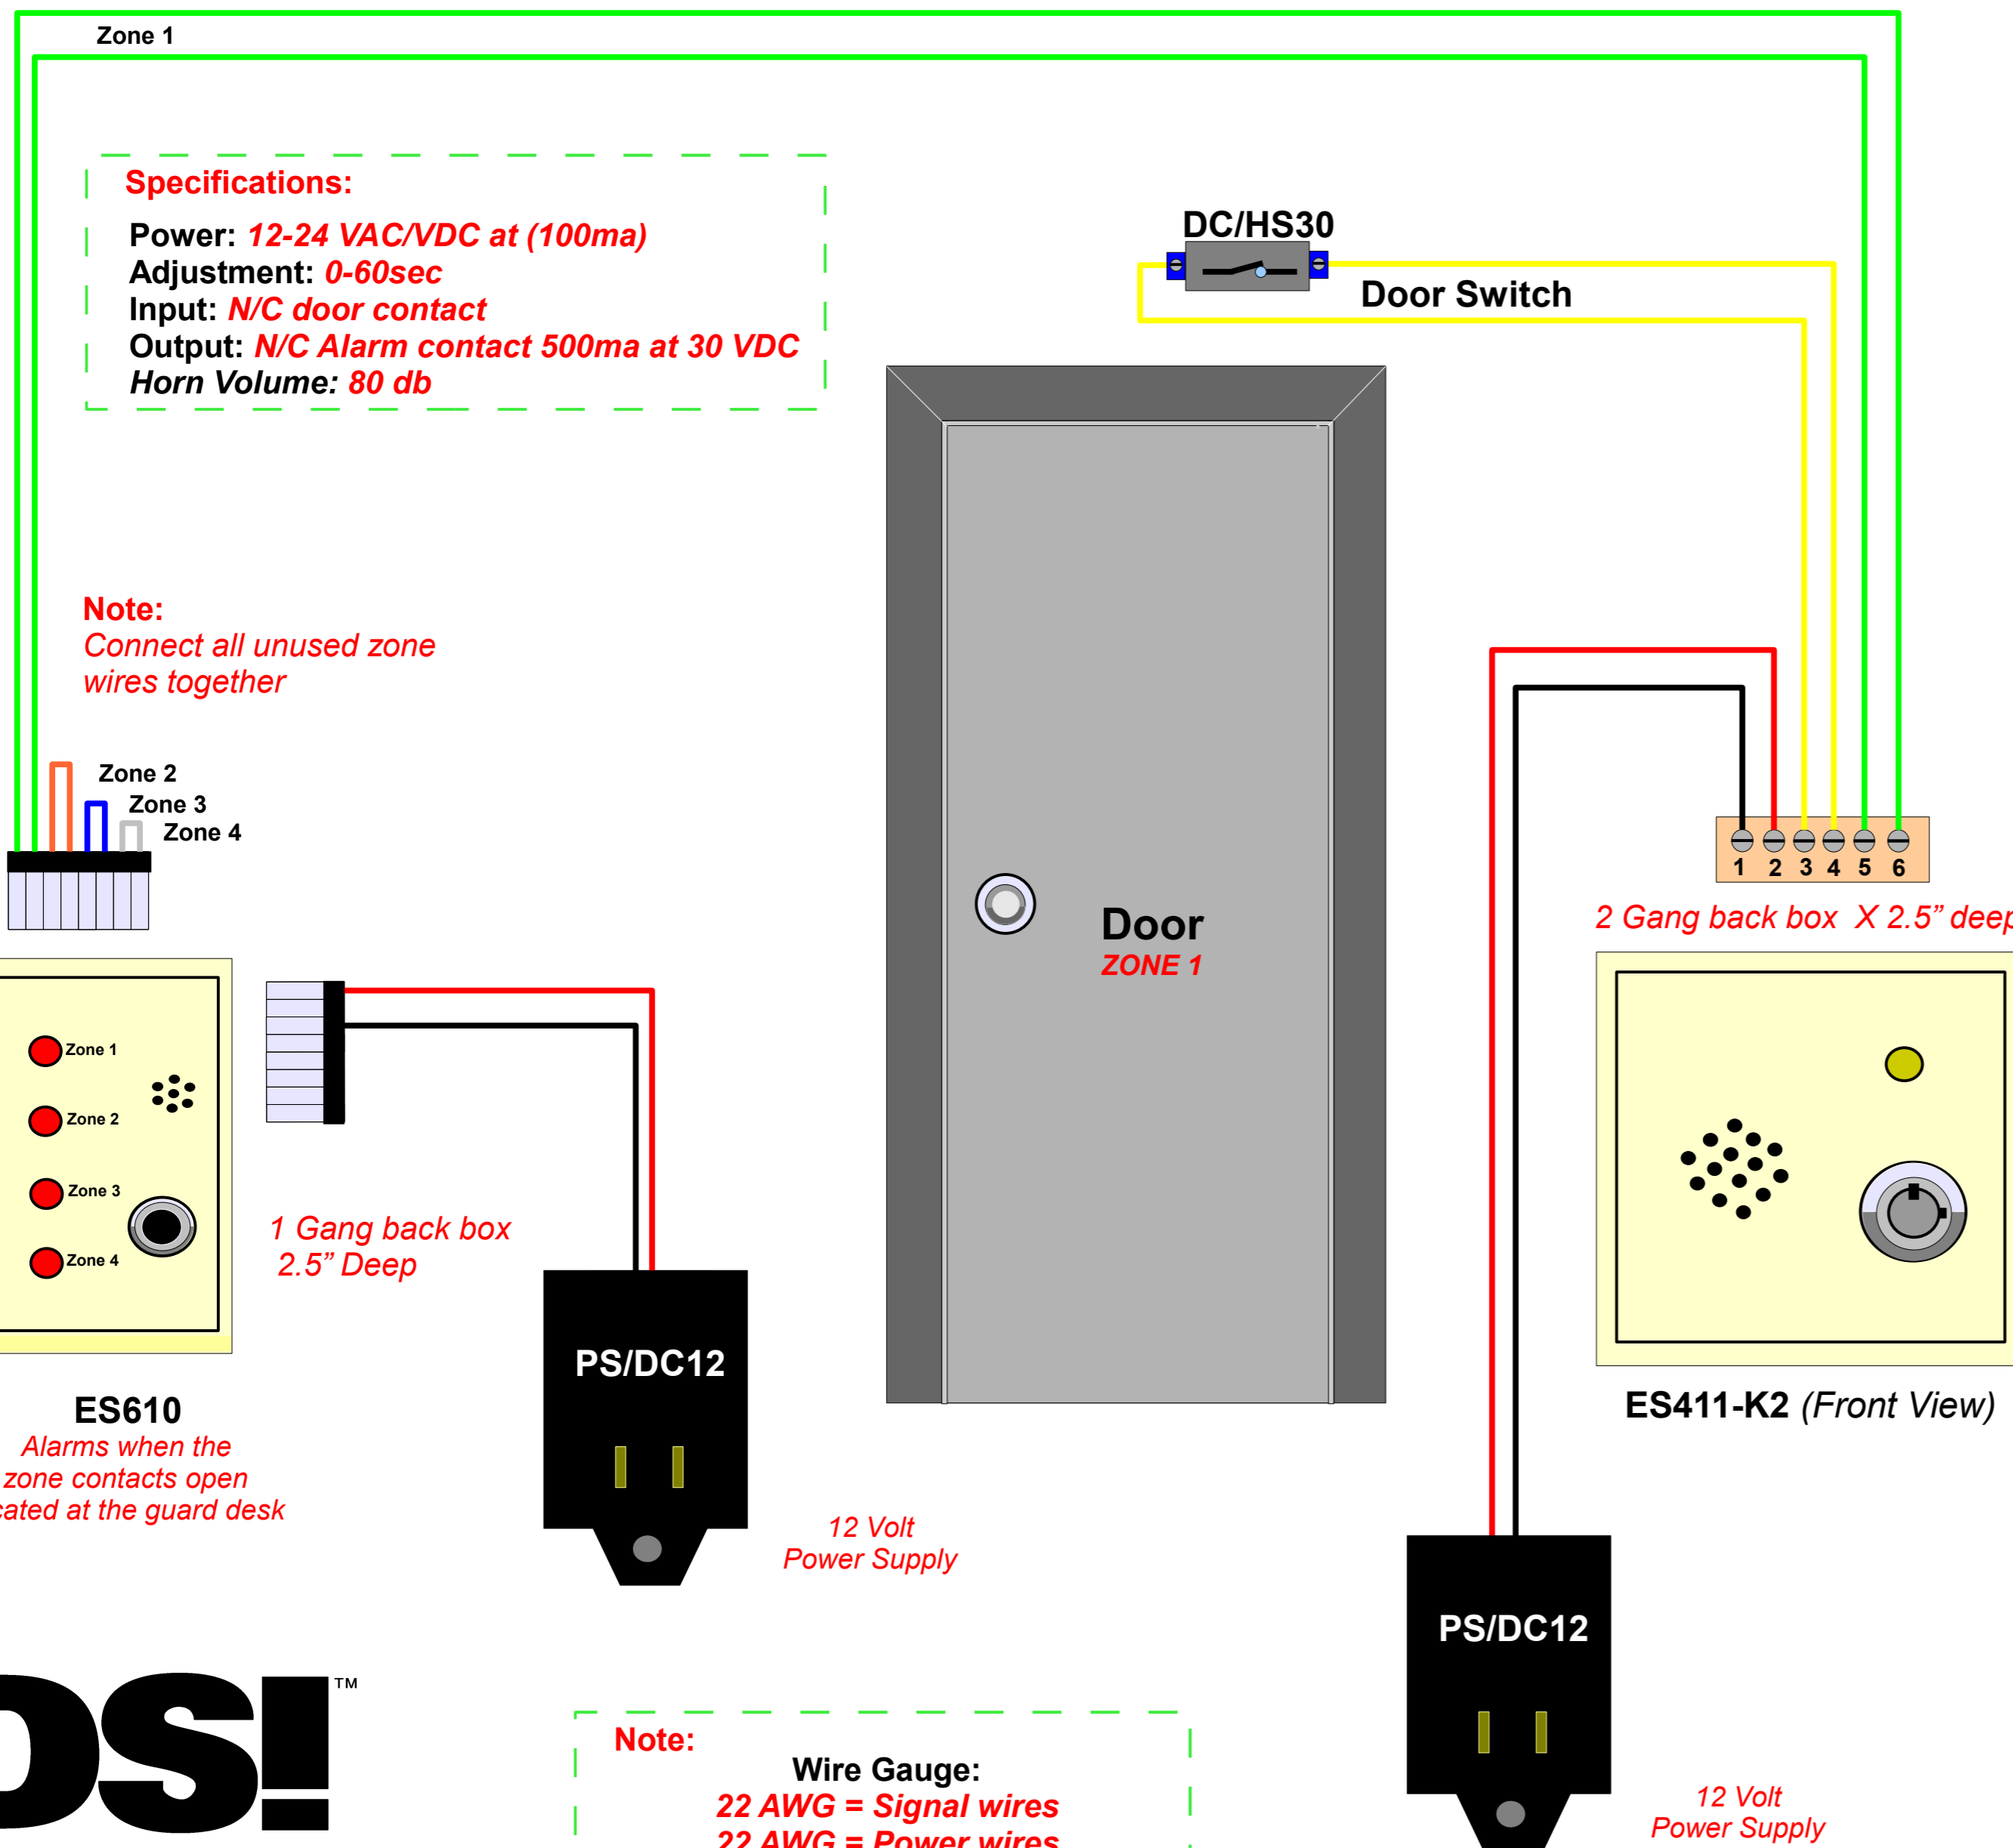

Specifications:

Power: 12-24 VAC/VDC at (100ma)
 Adjustment: 0-60sec
 Input: N/C door contact
 Output: N/C Alarm contact 500ma at 30 VDC
 Horn Volume: 80 db

Note:
 Connect all unused zone wires together

Note:
 Wire Gauge:
 22 AWG = Signal wires
 22 AWG = Power wires
 (Power runs over 50 feet use 18 AWG)